

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number
WO 2005/087615 A1

(51) International Patent Classification⁷: **B65D 83/14**,
B05B 11/00, A61M 15/08

(21) International Application Number:
PCT/GB2005/000944

(22) International Filing Date: 10 March 2005 (10.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0405477.1 11 March 2004 (11.03.2004) GB

(71) Applicant (for all designated States except US): **GLAXO GROUP LIMITED** [GB/GB]; Glaxo Wellcome House, Berkeley Avenue, Greenford Middlesex UB6 0NN (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BONNEY, Stanley**,


George [GB/GB]; c/o GlaxoSmithKline, Park Road, Ware Hertfordshire SG12 0DP (GB). **CONNELL, Hugh, Alexander** [GB/GB]; 8 Brookdale, Harvington, Evesham, Worcestershire WR11 8ND (GB). **DAVIES, Michael, Birsha** [GB/GB]; GlaxoSmithKline, Park Road, Ware, Hertfordshire SG12 0DP (GB). **GODFREY, James, William** [GB/GB]; GlaxoSmithKline, Park Road, Ware, Hertfordshire SG12 0DP (GB). **HEDLEY, Mark, Graham** [GB/GB]; GlaxoSmithKline, Park Road, Ware, Hertfordshire SG12 0DP (GB). **TANSLEY, Robert, William** [GB/GB]; Warwick Design Consultants Limited, 12 Waterloo Park Estate, Bidford on Avon, Warwickshire B50 4JH (GB).

(74) Agent: **MCKINNEL, Denise**; GlaxoSmithKline, Corporate Intellectual Property (CN925.1), 980 Great West Road, Brentford, Middlesex TW8 9GS (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

[Continued on next page]

(54) Title: A FLUID DISPENSING DEVICE

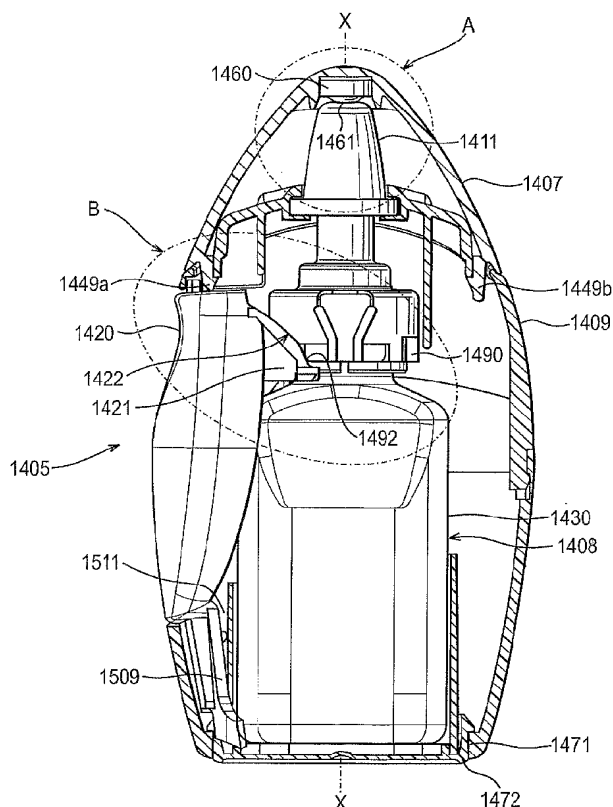

(57) Abstract: The present invention relates to a fluid dispensing device (1405) for dispensing a fluid product having a dispensing outlet (1411) from which the fluid product is dispensable, a supply of the fluid product, a dispensing member (1430) mounted for movement in a dispensing direction along an axis X-X from a first position to a second position which causes a dose of the fluid product in the supply to be dispensed from the dispensing outlet, and a finger-operable actuator member (1420) mounted for movement in an actuating direction which is generally transverse to the axis. The actuator member has at least one cam surface (1422) and the dispensing member has at least one cam follower surface (1492). The at least one cam surface has a commitment section (1423a), oriented at a first angle to the axis, and an adjacent drive section (1423b), which is oriented at a second angle to the axis which is greater than the first angle.

WO 2005/087615 A1



AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

A FLUID DISPENSING DEVICE

Field of the Invention

5 The present invention relates to a fluid dispensing device for dispensing a fluid product, for instance a medicament, and is particularly, but not exclusively, concerned with an intra-nasal dispensing device.

Background of the Invention

10

It is well known to provide a fluid dispenser in which fluid is dispensed via a nozzle or orifice upon the application of a force by a user to a pump dispenser. Such devices are generally arranged with a reservoir containing several doses of a fluid formulation to be dispensed by sequential metered pump actuations. An example of a pump action spray is shown and described in US patent No. 4,946,069.

A hand-held, manually-operable intra-nasal fluid medicament dispenser is disclosed in WO-A-03/095007, the entire content of which is hereby incorporated herein by reference. The dispenser has a housing which houses a fluid discharge device having a compression pump mounted on a container which contains the medicament. The housing has at least one finger-operable side lever which is movable inwardly with respect to the housing to cam the container upwardly in the housing to cause the pump to compress and pump a dose of the medicament out of a pump stem through a nasal nozzle of the housing. In an embodiment shown in Figures 19, 19a and 19b, a pair of opposed side levers co-operate with a collar mounted on the neck of the container. The collar provides cam follower surfaces which ride over cam surfaces of the levers when the levers are moved inwardly. The cam follower surfaces comprise sections which are inclined at different angles to the direction (axis) of cam

20

25

30

movement of the fluid discharge device. The steeper sections provide the dispenser with a commitment feature. In other words, only upon application of at least a minimum finger force to the side levers will the levers be able to overcome the steeper cam follower surface sections.

- 5 The magnitude of this force, coupled with the change of angle of the cam follower surfaces to the shallower sections, ensures that each lever slides rapidly over the cam follower surfaces once the steeper cam follower surface sections are overcome thereby providing for reliable compression of the compression pump and atomisation of the medicament.

10

The aim of the present invention is to provide improvements to fluid dispensing devices, in particular those for intra-nasal use and/or those operated with side-actuators.

15 Summary of the Invention

- According to the present invention there is provided a fluid dispensing device according to claim 1 hereof, a fluid dispensing device according to claim 30 hereof, a fluid dispensing device according to claim 37 hereof, a
20 fluid dispenser according to claim 42 hereof, a set according to claim 48 hereof, and a fluid dispenser according to claim 52 hereof.

Useful features of the invention are set forth in the other claims hereof.

- 25 The term "finger-operable" means operable by action of the finger or thumb, or combinations thereof, of a typical user (e.g. an adult or child patient).

- Typically, the minimum actuating force is in the range from 5 to 30N,
30 more typically from 10 to 25N. Such values tend to correspond to a force which presents a suitable 'barrier force' to a weak, nondescript or

unintended finger movement whilst readily being overcome by the determined finger (or thumb) action of a user. It will be appreciated that if the device is designed for use by a child or elderly patient it may have a lower minimum actuating force than that designed for adult usage.

5

Ideally, particularly for medicinal use, the dispenser of the invention dispenses metered doses of the fluid product.

Ideally, the dispenser is configured and arranged to dispense each dose of
10 the fluid product as an atomised spray.

Suitably, the fluid dispenser of the invention incorporates a pump to pump the fluid product dose from the dispenser. The pump may comprise a pre-compression pump, such as the VP3 or VP7 model, or a modified
15 version thereof, manufactured by Valois SA. Typically, such pre-compression pumps are typically used with a bottle (glass or plastic) container capable of holding 8-50ml of a fluid product. Each actuation will typically deliver 25-150 μ l, particularly 50-100 μ l, of the fluid product (i.e. a metered dose) and the device is therefore typically capable of providing at
20 least 50 (e.g. 60 or 100) metered doses.

Other suitable dispensing containers include those sold by Erich Pfeiffer GmbH, Rexam-Sofab and Saint-Cobain Calmar GmbH.

25 For the avoidance of doubt, the various aspects of the invention can be modified to incorporate the other aspects or one or more features of the other aspects.

Further aspects and features of the invention are set forth in the following
30 description of an exemplary embodiment of the invention made with reference to the accompanying drawings.

Brief Description of the Drawings

Figure 1 is a side view of a fluid dispensing device of the invention.

5

Figure 2 is a longitudinal sectional view of the dispenser.

Figure 3 is a partial longitudinal sectional view of the dispenser.

10 Figure 4 is an enlarged view of area A in Figure 3.

Figure 5 is an enlarged view of area B in Figure 3.

Figure 6 is a fragmentary, enlarged underneath plan view of a nozzle of
15 the fluid dispensing device mounted in a housing of the device.

Figure 7A is a schematic plan view of an actuator lever of the fluid
dispensing device.

20 Figure 7B is a side view of the lever taken on arrow A in Figure 7A.

Figure 8 is a side view of the nozzle.

Figure 9 is a schematic representation of a guide mechanism of the fluid
25 dispensing device.

Figure 10 is an enlarged view of one of a pair of beaks of the lever which
present a cam profile.

30 Figure 11 is a fragmentary, schematic view of the lever in an outward
position relative to the housing of the fluid dispensing device.

Detailed Description of the Exemplary Embodiment of the Invention

Figures 1 to 11 show a fluid dispensing device 1405 for spraying a fluid
5 into a nasal cavity of a human user which is in accordance with the present invention.

The fluid dispensing device 1405 comprises a plastics housing 1409 (e.g. of ABS), a nozzle 1411 for insertion into the nasal cavity at an upper end
10 of the housing 1409 and a fluid discharge device 1408 housed within the housing 1409 for reciprocal translation along its longitudinal axis X-X. As shown in Figures 1 to 5, when the fluid discharge device 1408 is received in the housing 1409, its longitudinal axis X-X is in-line with the nozzle 1411.

15

The outer surface, or a part of the outer surface, of the nozzle 1411 can be made from a soft-touch plastics material. However, in this embodiment the nozzle 1411 is made from polypropylene (PP).

20 The fluid discharge device 1408 comprises a container 1430, for storing enough of the fluid for multiple metered doses thereof to be dispensed, and a compression pump 1429 mounted on the container 1430. The container 1430 is made from a translucent or transparent plastics material, although it will be apparent that it could be made from other
25 translucent or transparent materials, such as glass. The pump 1429 has a suction inlet 1461, in the form of a dip tube, located within the container 1430 and a discharge outlet 1463, in the form of a pump stem, for transferring fluid from the pump 1429 to the nozzle 1411.

30 The housing 1409 is provided with a window 1450 through which the level of the fluid in the container 1430 can be checked.

Pivotaly mounted to the housing is a finger operable means 1420 to apply a force to the container 1430 in a direction which is transverse to the longitudinal axis X-X. This transverse force moves the container 1430
5 towards the nozzle 1411 along the longitudinal axis X-X so as to actuate the pump 1429. The finger operable means is in the form of a lever 1420 (e.g. of ABS) pivotaly connected at its lower end to the housing 1409 and arranged to act upon the container 1430 so as to urge the container 1430 towards the nozzle 1411 when the lever 1420 is pivoted inwardly by a
10 user's finger or thumb.

A protective end cap 1407 is provided for protection of the nozzle 1411. First and second lugs 1449a, 1449b project from the protective end cap 1407 for receipt within suitably arranged channels 1451a, 1451b provided
15 within the housing 1409 such as to allow secure attachment of the end cap 1407 to the housing 1409. When so-received, first lug 1449a further interferes with movement of lever 1420 such as to prevent actuation (i.e. to lock movement) of the lever 1420 when the end cap 1407 and lugs 1449a, 1449b are in place (i.e. in the nozzle covered position).

20

The end cap 1407 also has a protruding stopper 1460 which has a convex, resilient end form 1461 arranged for sealing engagement with the dispensing orifice 1415 of the nozzle 1411 so as provide an essentially airtight seal to nozzle orifice 1415 to prevent fluid drain back when the
25 stopper 1460 is in place.

The end cap is suitably made from the same material as the housing, e.g. a plastics material, suitably ABS.

30 As will be understood by reference to Figures 3, 5 and 7A, the lever 1420 has a pair of beaks or noses 1421 which each present a cam surface 1422

arranged for interaction with one of a pair of cam follower surfaces 1492 provided on a collar 1490 (e.g. of acetal) fixed around the neck of the container 1430. It will be appreciated that a sideways force (i.e. substantially transversely to the longitudinal axis X-X of the fluid discharge device 1408) applied to the lever 1420 results in the cam follower surfaces 1492 riding over the cam surfaces 1422 thereby resulting in upward movement (i.e. along the longitudinal axis X-X) of the fluid discharge device 1408.

10 In more detail, the beaks 1421 are located at the upper end of the lever 1420 on opposite sides thereof. In plan view, the upper end of the lever 1420 has a U-shaped cross section, as shown in Figure 7A. The beaks 1421 straddle opposed sides of the fluid discharge device 1408 for co-operation with the diametrically opposed cam follower surfaces 1492 on
15 the collar 1490. Noting that the fluid dispensing device 1405 only has one actuator lever 1420, the use of a pair of beaks 1421 improves the ability of the lever 1420 to cam the fluid discharge device 1408 upwardly along its longitudinal axis X-X.

20 Each cam surface 1422 of the lever 1420 has a variable mechanical ratio arranged such that until a pre-determined force is applied to the lever 1420 no significant force is transferred to the container 1430. In more detail, each cam surface 1422 has a commitment portion 1423a which is inclined at a first angle to the longitudinal axis X-X of the fluid discharge
25 device 1408 and a drive portion 1423b inclined to the longitudinal axis X-X at a second angle which is greater than the first angle. The first angle should be no less than approximately 20°, and is suitably in the range of approximately 20-35°, more suitably approx. 20-26°, even more suitably approx. 22-26°. The second angle may be in the range of approximately
30 40-60°, suitably approx. 40-50°, more suitably approx. 45°.

Therefore, when an inward force is initially applied to the lever 1420 it is applied substantially normally to the longitudinal axis X-X of the fluid discharge device 1408 and virtually no force is converted into a force along the longitudinal axis X-X of the fluid discharge device 1408 and so
5 the static friction between the commitment portions 1423a of the beaks 1421 and the cam follower surfaces 1492 is sufficient to maintain the lever 1420 effectively stationary. However, when a pre-determined load is applied to the lever 1420 the static friction is overcome and the cam follower surfaces 1492 start riding on the commitment portions 1423a.

10

When the cam follower surfaces 1492 reach the end of the commitment portions 1423a, the increase in inclination of the cam surfaces to the longitudinal axis X-X in combination with the magnitude of the force being applied ensures that the cam follower surfaces 1490 suddenly slide rapidly
15 along the drive portions 1423b causing the container 1430 to be moved rapidly towards the nozzle 1411 to actuate the compression pump. This ensures that the pump is only actuated when sufficient force is being applied to guarantee the production of an effective spray from the nozzle 1411.

20

Referring to Figure 10, it will be seen that the commitment portions 1423a are planar sections of the cam surfaces 1422, whereas the drive portions 1423b are arcuate. More specifically, the drive portions 1423b have a short rounded transition section 1423c contiguous with the associated
25 commitment portion 1423a. The transition sections 1423c have a radius of curvature R1 which is greater than the radius of curvature R2 of the remainder of the drive portion 1423b, which radius R2 is constant over the length of the remainder of the drive portion 1423b. The transition portions 1423c smooth the transfer of the cam follower surfaces 1429
30 from the commitment portions 1423a of the cam surfaces 1422 to the

drive portions 1423b. They also reduce wearing of the cam surfaces 1422.

R1 in this embodiment is about 3mm, while R2 is about 25mm.
5 Nonetheless, other radii could be used, as will be appreciated by the skilled person in the art.

Referring to Figure 3, the cam follower surfaces 1492 are rounded edges of diametrically-opposed embossments 1493 on the plastic collar 1490.
10 This makes riding of the cam follower surfaces 1492 on the cam surfaces 1422 easier, and also reduces wearing of the respective surfaces.

As shown in Figures 5 and 10, the beaks 1421 have a tip which forms a cradle 1424 for the embossments 1493 on the collar 1490 of the fluid
15 discharge device 1408 to rest on. The cradles 1424 present a support surface 1424a which extends transversely to the longitudinal axis X-X on which the embossments 1493 can be supported. The cradles 1424 act as a back-stop for the fluid discharge device 1408 insofar as preventing the fluid discharge device 1408 moving downwardly beyond the point at which
20 the cradles 1424 engage with the embossments 1493. As will be seen from Figure 5, this ensures that the cam follower surfaces 1492 are aligned with the commitment portion 1423a of the cam surfaces 1422.

Noting that the lever 1420 pivots inwardly, it will be appreciated that as
25 the lever 1420 pivots inwardly the inclined angle which the planar commitment portions 1423a make with the longitudinal axis X-X becomes smaller (steeper) thereby increasing the resistance of the fluid discharge device 1408 to being cammed upwardly.

30 However, the arcuate nature of the drive portions 1423b, in particular that part after the transition section 1423c, is such that the inclined angle it

makes with the longitudinal axis X-X remains the same, or substantially the same, as the lever 1420 pivots inwardly. More specifically, consider that as the lever 1420 pivots inwardly the point on the section of the drive portion 1423b having the radius of curvature R2 which is in contact with
5 the cam follower surface 1492 moves up the cam surface 1422. The angle that a tangent to this changing contact point makes with the longitudinal axis X-X remains the same, or substantially the same, as the lever 1420 pivots inwardly to cause the fluid discharge device 1408 to spray a metered dose of the fluid product from the nozzle 1411. This
10 feature means that the resistance to the inward movement of the lever 1420 never increases after the commitment feature has been overcome, as would be the case if the drive portion 1423b were a planar surface since its angle to the longitudinal axis X-X would then increase as the lever 1420 pivots inwardly.

15

The aforementioned features of the cam profile mean that the operator receives smooth tactile feedback from the device 1405 when the lever 1420 is actuated to cause the fluid discharge device 1408 to spray a metered dose of the fluid product from the nozzle 1411.

20

To use the fluid dispensing device 1405 a user first has to remove the protective cap 1407 thereby unsealing the nozzle orifice 1415 by removing the stopper end 1460 therefrom. The user then grasps the fluid dispensing device 1405 and places a thumb and/or finger on the lever
25 1420.

Provided that only a light pressure is applied to the lever 1420 no fluid will be discharged and the user is able to manoeuvre the dispensing nozzle 1411 of the fluid dispensing device 1405 into one of their nostrils so that
30 the fluid is able to be dispensed into the nasal cavity.

If the user then squeezes the lever 1420 inwards with increasing force the threshold force defined by the interaction of the cam follower surfaces 1492 with the commitment portions 1423a of the cam surfaces 1422 is overcome resulting in the container 1430 being moved rapidly towards the
5 nozzle 1411 to actuate the pump 1429 and dispense fluid to the dispensing orifice 1415. Upon release of the pressure applied to the lever 1420 the pump is reset by its internal return spring. Moreover, the lever 1420 has a leaf spring 1465 (Figure 2) which acts against a housing inner wall 1467 to bias the lever 1420 to its rest position shown in Figures 1 to
10 3 and 5.

The actuating procedure can then be repeated until all of the fluid in the container 1430 has been used. However, only one or two doses of fluid are normally administered at a time.

15

Referring to Figures 5 and 9, to counteract the lateral force which the lever 1420 applies to the fluid discharge device 1408, and to guide the axial displacement of the fluid discharge device 1408 in response to the lever operation, the collar 1490 has a pair of diametrically opposed, tracks
20 1469 which are arranged parallel to the longitudinal axis X-X. These tracks 1469 are provided by the embossments 1493. Each track 1469 has a funnel shape at its upper end for self-guiding of the tracks 1469 onto complementary axially-extending runners 1467, presented on the inner surface of the housing 1409, when the fluid discharge device 1408 is
25 inserted into the housing 1409 through an (lower) opening 1471 in its lower end, which lower opening 1471 is subsequently closed with a cap 1472. It will also be appreciated that the track-runner mechanism positions the collar 1490 in the correct angular orientation about the longitudinal axis X-X so that the cam follower surfaces 1492 face the cam
30 surfaces 1422.

In use, the tracks 1469 ride on the runners 1467 when the lever 1420 overcomes the threshold force provided by the commitment portions 1423a of the cam surfaces 1422. As will be appreciated, the co-operation of the tracks 1469 with the runners 1467 prevents rotation of the collar
5 1490 in the housing 1409.

In addition to the tracks 1469, the collar also has a sheath 1473 for the pump stem 1463 which forms a sliding fit on an inner hollow post 1475 of the nozzle 1411 in which a nozzle outlet passage 1477 is formed. As
10 shown in Figure 2, the pump stem 1463 is located in a lower widened portion of the outlet passageway 1477 through an interference fit. It will therefore be appreciated that the pump stem 1463 remains stationary in the housing 1409 as the container 1430 and the collar 1490 are translated upwardly by the lever 1420, i.e. there is relative movement between the
15 container-collar unit and the pump stem. In this way, the pump 1429 is compressed and a metered dose of the fluid product discharged through the pump stem 1463 into the outlet passageway 1477 for ejection from the nozzle orifice 1415 at the end of the outlet passageway 1477. The commitment feature on the lever 1420 ensures that the pumping force is
20 sufficient for atomisation of the fluid product from the nozzle 1411.

As shown in Figure 8, the nozzle 1411 in this embodiment is formed as a separate part from the housing 1409. This has advantages when the fluid product being dispensed is a medicament because this isolates the only
25 part of the device that comes into contact with the medicament. Accordingly, testing of the pharmaceutical performance of the nozzle 1411 can be conducted without the need for the housing 1409. So, once the nozzle 1411 is complete, testing of it can begin while the development and design of the housing 1409 continues. Therefore there is no hold up
30 in the device development, as would be the case if the nozzle 1411 were integrally formed with the housing 1409. Any change in the moulding of

the housing would require re-testing of the nozzle 1411 to confirm that the new moulding has had no adverse effect on the nozzle performance.

In addition, having a separate nozzle 1411 means that the housing 1409
5 can be customised for different markets and/or different products. As an example, the nozzle 1411 could be a universal nozzle for a set of housings having different shapes, different colours, etc.

A further advantage of a separate nozzle 1411 is that it can be more
10 easily formed from a different material than the housing 1409, for example one that is more acceptable for insertion into a nostril and/or for contacting the fluid product, especially where this is a medicament, but which might be too expensive to form the whole housing 1409 from.

15 To this end, and as shown in Figure 2, the housing 1409 has an (upper) opening 1480 at its upper end through which the nozzle 1411 is insertable. Referring to Figures 2, 6 and 8, the nozzle 1411 has a flange 1481 at its lower end which engages the inner mouth of the upper opening 1480 so that the tip of the nozzle 1411 projects from the upper
20 opening 1480 the required distance for nasal use. As will be seen from Figures 2 and 6, the inner mouth of the upper opening 1480 is bounded by a collar 1483 formed from a series of collar segments 1485 angularly spaced-apart about the longitudinal axis X-X. The collar segments 1485 are bent over the nozzle flange 1481 by a swaging tool to clamp the
25 nozzle flange 1481 against the inner mouth to fix the nozzle 1411 in the upper opening 1480.

To assist in assembly of the fluid dispensing device 1405, the lever 1420 is provided with means to enable it to be disposed in an outward position
30 with respect to the housing 1409, to allow the fluid discharge device 1408 to be inserted into the housing 1409 through the lower opening 1471 to

its rest position shown in Figures 1, 3 and 5, and the inward position with respect to the housing 1409 shown in Figures 1 to 3.

Referring to Figures 7A, 7B and 11, at the upper end of the lever 1420 there is provided a tab 1501 which projects above the upper edge 1502 of the lever 1420. The tab 1501 projects from a resilient bridge element 1503 formed by a cut-out 1505 in the lever 1420. The resilient bridge element 1503 biases the tab 1501 to its extended position shown in Figures 7A, 7B and 11, but enables the tab 1501 to be depressed so that it is flush with, or below, the lever upper edge 1502.

As will be understood from Figure 1, the lever 1420 is mounted in a slot 1507 formed in the side of the housing 1409. The lever 1420, which is formed separately from the housing 1409, but from the same plastics material, is mounted to the housing by first inserting its lower end 1509, which carries the leaf spring 1465, through the slot 1507 to be received in an axial channel 1511. The lever 1420 is now disposed in its outward position with the tab 1501 bearing against the edge of the slot 1507 to prevent the lever 1420 being moved through the slot 1507 to its inward position, as schematically shown in Figure 11.

When the lever 1420 is in its outward position, the fluid discharge device 1408 is able to be inserted into the housing 1409 through the lower housing opening 1471 to its rest position because the lever 1420, and its beaks 1422 in particular, do not impede the loading of the fluid discharge device 1408.

After the fluid discharge device 1408 has been loaded to its rest position, the lever 1420 is moved to its inward position by depressing the tab 1501 so that it clears the edge of the slot 1507 and then pushing the lever 1420 inwardly to its position shown in Figure 2, for example. If the lever 1420

were in its inward position before the fluid discharge device 1408 were loaded into the housing 1409, the fluid discharge device could not be loaded into the housing 1409 to its rest position, not without damaging the lever 1420 in any event.

5

As shown in Figure 2, for example, once the lever 1420 is moved to its inward position, the tab 1501 returns to its extended position and bears against an inner surface of the housing 1409 to maintain the lever 1420 in the inward position. In this regard, the lever leaf spring 1465 biases the
10 lever 1420 outwardly.

In more detail, the tab 1501 bears against an inner surface of one of the channels 1451a in the housing 1409 in which the cap lugs 1449a, 1449b are snap-fitted to hold the protective cap 1407 releasably captive on the
15 housing 1409. As shown in Figure 2, the lug 1449a received in the channel 1451a is located in front of the tab 1501. It will therefore be gathered that the lever 1420 is prevented from moving inwardly when the cap 1407 is in place, to actuate the fluid dispensing device 1405, by the lug 1449a blocking inward movement of the lever tab 1501.

20

Those parts of the fluid dispensing device 1405 made from a plastics material are formed by a moulding process.

Other features of this exemplary embodiment are contained in the other
25 sections of this specification, including, without limitation, the appended claims and statements in the 'Summary of the Invention' section *supra*.

The fluid discharge device 1408 may contain a medicament formulation, for example for the treatment of mild, moderate or severe acute or
30 chronic symptoms or for prophylactic treatment. The precise dose administered will depend on the age and condition of the patient, the

particular medicament used and the frequency of administration and will ultimately be at the discretion of the attendant physician. When combinations of medicaments are employed the dose of each component of the combination will in general be that employed for each component
5 when used alone.

Appropriate medicaments may be selected from, for example, analgesics, e.g., codeine, dihydromorphine, ergotamine, fentanyl or morphine; aninal preparations, e.g., diltiazem; antiallergics, e.g., cromoglycate (eg
10 as the sodium salt), ketotifen or nedocromil (eg as the sodium salt); antiinfectives e.g., cephalosporins, penicillins, streptomycin, sulphonamides, tetracyclines and pentamidine; antihistamines, e.g., methapyrilene; anti- inflammatories, e.g., beclomethasone (eg as the dipropionate ester), fluticasone (eg as the propionate ester), flunisolide,
15 budesonide, rofleponide, mometasone (eg as the furoate ester), ciclesonide, triamcinolone (eg as the acetone), 6 α , 9 α -difluoro-11 β -hydroxy-16 α -methyl-3-oxo-17 α -propionyloxy-androsta-1,4-diene-17 β -carbothioic acid S-(2-oxo-tetrahydro-furan-3-yl) ester or 6 α , 9 α -Difluoro-17 α -[(2-furanylcabonyl)oxy]-11 β -hydroxy-16 α -methyl-3-oxo-androsta-
20 1,4-diene-17 β -carbothioic acid S-fluoromethyl ester; antitussives, e.g., noscapine; bronchodilators, e.g., albuterol (eg as free base or sulphate), salmeterol (eg as xinafoate), ephedrine, adrenaline, fenoterol (eg as hydrobromide), formoterol (eg as fumarate), isoprenaline, metaproterenol, phenylephrine, phenylpropanolamine, pirbuterol (eg as
25 acetate), reproterol (eg as hydrochloride), rimiterol, terbutaline (eg as sulphate), isoetharine, tulobuterol or 4-hydroxy-7-[2-[[2-[[3-(2-phenylethoxy)propyl]sulfonyl]ethyl]amino]ethyl-2(3H)-benzothiazolone; PDE4 inhibitors eg cilomilast or roflumilast; leukotriene antagonists eg montelukast, pranlukast and zafirlukast; [adenosine 2a agonists, eg
30 2R,3R,4S,5R)-2-[6-Amino-2-(1S-hydroxymethyl-2-phenyl-ethylamino)-purin-9-yl]-5-(2-ethyl-2H-tetrazol-5-yl)-tetrahydro-furan-3,4-diol (e.g. as

maleate)]*; [α 4 integrin inhibitors eg (2S)-3-[4-({[4-(aminocarbonyl)-1-piperidinyl]carbonyl}oxy)phenyl]-2-(((2S)-4-methyl-2-{[2-(2-methylphenoxy) acetyl]amino}pentanoyl)amino] propanoic acid (e.g as free acid or potassium salt)]*, diuretics, e.g., amiloride; anticholinergics, 5 e.g., ipratropium (eg as bromide), tiotropium, atropine or oxitropium; hormones, e.g., cortisone, hydrocortisone or prednisolone; xanthines, e.g., aminophylline, choline theophyllinate, lysine theophyllinate or theophylline; therapeutic proteins and peptides, e.g., insulin or glucagons. It will be clear to a person skilled in the art that, where appropriate, the 10 medicaments may be used in the form of salts, (e.g., as alkali metal or amine salts or as acid addition salts) or as esters (e.g., lower alkyl esters) or as solvates (e.g., hydrates) to optimise the activity and/or stability of the medicament and/or to minimise the solubility of the medicament in the propellant.

15

Preferably, the medicament is an anti-inflammatory compound for the treatment of inflammatory disorders or diseases such as asthma and rhinitis.

20 In one aspect, the medicament is a glucocorticoid compound, which has anti-inflammatory properties. One suitable glucocorticoid compound has the chemical name: 6α , 9α -Difluoro- 17α -(1-oxopropoxy)- 11β -hydroxy- 16α -methyl-3-oxo-androsta-1,4-diene- 17β -carbothioic acid *S*-fluoromethyl ester (fluticasone propionate). Another suitable glucocorticoid compound 25 has the chemical name: 6α , 9α -difluoro- 17α -[(2-furanylcarbonyl)oxy]- 11β -hydroxy- 16α -methyl-3-oxo-androsta-1,4-diene- 17β -carbothioic acid *S*-fluoromethyl ester. A further suitable glucocorticoid compound has the chemical name: 6α , 9α -Difluoro- 11β -hydroxy- 16α -methyl- 17α -[(4-methyl-1,3-thiazole-5-carbonyl)oxy]-3-oxo-androsta-1,4-diene- 17β -carbothioic 30 acid *S*-fluoromethyl ester.

Other suitable anti-inflammatory compounds include NSAIDs e.g. PDE4 inhibitors, leukotriene antagonists, iNOS inhibitors, tryptase and elastase inhibitors, beta-2 integrin antagonists and adenosine 2a agonists.

- 5 The medicament is formulated as any suitable fluid formulation, particularly a solution (e.g. aqueous) formulation or a suspension formulation, optionally containing other pharmaceutically acceptable additive components.
- 10 Suitably, the fluid medicament formulation herein has a viscosity of from 10 to 2000 mPa.s (10 to 2000 centipoise), particularly from 20 to 1000 mPa.s (20 to 1000 centipoise), such as from 50 to 1000 mPa.s (50 to 1000 centipoise) at 25°C.
- 15 Suitable formulations (e.g. solution or suspension) may be stabilised (e.g. using hydrochloric acid or sodium hydroxide) by appropriate selection of pH. Typically, the pH will be adjusted to between 4.5 and 7.5, preferably between 5.0 and 7.0, especially around 6 to 6.5.
- 20 Suitable formulations (e.g. solution or suspension) may comprise one or more excipients. By the term "excipient", herein, is meant substantially inert materials that are non-toxic and do not interact with other components of a composition in a deleterious manner including, but not limited to, pharmaceutical grades of carbohydrates, organic and inorganic
- 25 salts, polymers, amino acids, phospholipids, wetting agents, emulsifiers, surfactants, poloxamers, pluronics, and ion exchange resins, and combinations thereof.

Suitable carbohydrates include monosaccharides include fructose;
30 disaccharides, such as, but not limited to lactose, and combinations and derivatives thereof; polysaccharides, such as, but not limited to, cellulose

and combinations and derivatives thereof; oligosaccharides, such as, but not limited to, dextrans, and combinations and derivatives thereof; polyols, such as but not limited to sorbitol, and combinations and derivatives thereof.

5

Suitable organic and inorganic salts include sodium or calcium phosphates, magnesium stearate, and combinations and derivatives thereof.

10 Suitable polymers include natural biodegradable protein polymers, including, but not limited to, gelatin and combinations and derivatives thereof; natural biodegradable polysaccharide polymers, including, but not limited to, chitin and starch, crosslinked starch and combinations and derivatives thereof; semi-synthetic biodegradable polymers, including, but
15 not limited to, derivatives of chitosan; and synthetic biodegradable polymers, including, but not limited to, polyethylene glycols (PEG), polylactic acid (PLA), synthetic polymers including but not limited to polyvinyl alcohol and combinations and derivatives thereof;

20 Suitable amino acids include non-polar amino acids, such as leucine and combinations and derivatives thereof. Suitable phospholipids include lecithins and combinations and derivatives thereof.

Suitable wetting agents, surfactants and/or emulsifiers include gum
25 acacia, cholesterol, fatty acids including combinations and derivatives thereof. Suitable poloxamers and/or Pluronics include poloxamer 188, Pluronic® F-108, and combinations and derivations thereof. Suitable ion exchange resins include amberlite IR120 and combinations and derivatives thereof;

30

Suitable solution formulations may comprise a solubilising agent such as a surfactant. Suitable surfactants include α -[4-(1,1,3,3-tetramethylbutyl)phenyl]- ω -hydroxypoly(oxy-1,2-ethanediyl) polymers including those of the Triton series e.g. Triton X-100, Triton X-114 and
5 Triton X-305 in which the X number is broadly indicative of the average number of ethoxy repeating units in the polymer (typically around 7-70, particularly around 7-30 especially around 7-10) and 4-(1,1,3,3-tetramethylbutyl)phenol polymers with formaldehyde and oxirane such as those having a relative molecular weight of 3500-5000 especially 4000-
10 4700, particularly Tyloxapol. The surfactant is typically employed in a concentration of around 0.5-10%, preferably around 2-5% w/w based on weight of formulation.

Suitable solution formulations may also comprise hydroxyl containing
15 organic co-solvating agents include glycols such as polyethylene glycols (eg PEG 200) and propylene glycol; sugars such as dextrose; and ethanol. Dextrose and polyethylene glycol (eg PEG 200) are preferred, particularly dextrose. Propylene glycol is preferably used in an amount of no more than 20%, especially no more than 10% and is most preferably avoided
20 altogether. Ethanol is preferably avoided. The hydroxyl containing organic co-solvating agents are typically employed at a concentration of 0.1-20% e.g. 0.5-10%, e.g. around 1-5% w/w based on weight of formulation.

Suitable solution formulations may also comprise solubilising agents such
25 as polysorbate, glycerine, benzyl alcohol, polyoxyethylene castor oils derivatives, polyethylene glycol and polyoxyethylene alkyl ethers (e.g. Cremophors, Brij).

Suitable solution formulations may also comprise one or more of the
30 following components: viscosity enhancing agents; preservatives; and isotonicity adjusting agents.

Suitable viscosity enhancing agents include carboxymethylcellulose, veegum, tragacanth, bentonite, hydroxypropylmethylcellulose, hydroxypropylcellulose, hydroxyethylcellulose, poloxamers (eg. poloxamer
5 407), polyethylene glycols, alginates xanthym gums, carageenans and carbopols.

Suitable preservatives include quaternary ammonium compounds (e.g. benzalkonium chloride, benzethonium chloride, cetrimide and
10 cetylpyridinium chloride), mercurial agents (e.g. phenylmercuric nitrate, phenylmercuric acetate and thimerosal), alcoholic agents (e.g. chlorobutanol, phenylethyl alcohol and benzyl alcohol), antibacterial esters (e.g. esters of para-hydroxybenzoic acid), chelating agents such as disodium edetate (EDTA) and other anti-microbial agents such as
15 chlorhexidine, chlorocresol, sorbic acid and its salts and polymyxin.

Suitable isotonicity adjusting agents act such as to achieve isotonicity with body fluids (e.g. fluids of the nasal cavity), resulting in reduced levels of irritancy associated with many nasal formulations. Examples of suitable
20 isotonicity adjusting agents are sodium chloride, dextrose and calcium chloride.

Suitable suspension formulations comprise an aqueous suspension of particulate medicament and optionally suspending agents, preservatives,
25 wetting agents or isotonicity adjusting agents.

The particulate medicament suitably has a mass mean diameter (MMD) of less than $20\mu\text{m}$, preferably between $0.5\text{-}10\mu\text{m}$, especially between $1\text{-}5\mu\text{m}$. If particle size reduction is necessary, this may be achieved by techniques
30 such as micronisation and/or microfluidisation.

Suitable suspending agents include carboxymethylcellulose, veegum, tragacanth, bentonite, methylcellulose and polyethylene glycols.

Suitable wetting agents function to wet the particles of medicament to
5 facilitate dispersion thereof in the aqueous phase of the composition.
Examples of wetting agents that can be used are fatty alcohols, esters and ethers. Preferably, the wetting agent is a hydrophilic, non-ionic surfactant, most preferably polyoxyethylene (20) sorbitan monooleate (supplied as the branded product Polysorbate 80).

10

Suitable preservatives and isotonicity adjusting agents are as described above in relation to solution formulations.

The dispensing device herein is suitable for dispensing fluid medicament
15 formulations for the treatment of inflammatory and/or allergic conditions of the nasal passages such as rhinitis e.g. seasonal and perennial rhinitis as well as other local inflammatory conditions such as asthma, COPD and dermatitis.

20 A suitable dosing regime would be for the patient to inhale slowly through the nose subsequent to the nasal cavity being cleared. During inhalation the formulation would be applied to one nostril while the other is manually compressed. This procedure would then be repeated for the other nostril. Typically, one or two inhalations per nostril would be administered by the
25 above procedure up to three times each day, ideally once daily. Each dose, for example, may deliver 5 μ g, 50 μ g, 100 μ g, 200 μ g or 250 μ g of active medicament. The precise dosage is either known or readily ascertainable by those skilled in the art.

It will be understood that the present disclosure is for the purpose of illustration only and the invention extends to modifications, variations and improvements thereto.

- 5 All usage herein of terms such as "about", "approximately", "substantially" and the like in relation to a parameter or property is meant to include the exact parameter or property as well as immaterial deviations therefrom.

Claims

1. A fluid dispensing device for dispensing a fluid product having:-
a dispensing outlet from which the fluid product is dispensable,
5 a supply of the fluid product,
a dispensing member mounted for movement in a dispensing direction
along an axis from a first position to a second position which causes a
dose of the fluid product in the supply to be dispensed from the
dispensing outlet, and
10 a finger-operable actuator member mounted for movement in an
actuating direction which is generally transverse to the axis,
wherein the actuator member has at least one cam surface and the
dispensing member has at least one cam follower surface,
wherein the actuator member is movable in the actuating direction to
15 cause the at least one cam surface to bear against the at least one cam
follower surface to force the at least one cam follower surface to ride over
the cam surface to cam the dispensing member in the dispensing direction
from the first position to the second position,
wherein the at least one cam surface has a commitment section, oriented
20 at a first angle to the axis, and an adjacent drive section, which is
oriented at a second angle to the axis which is greater than the first
angle,
wherein the device is configured and arranged such that, in use, the at
least one cam follower surface successively rides over the commitment
25 and drive sections of the at least one cam surface, on movement of the
actuator member in the actuating direction, to cam the dispensing
member from the first position to the second position, and
wherein the first angle is selected such that a minimum actuating force is
required to be applied to the actuator member to cause the at least one
30 cam follower surface to ride over the commitment section onto the drive
section.

2. The device of claim 1, wherein the first angle is in the range of about 20-35°.
- 5 3. The device of claim 1 or 2, wherein the commitment section is planar.
4. The device of claim 1, 2 or 3, wherein the minimum actuating force is in the range of about 20-45N.
- 10 5. The device of any of the preceding claims, wherein the second angle is in the range of about 40-60°.
6. The device of any of the preceding claims, wherein the drive section
15 has an arcuate transition portion contiguous with the commitment section.
7. The device of claim 6, wherein the transition portion has a radius of curvature in the range of about 1-5mm.
- 20 8. The device of any of claims 1 to 6, wherein the drive section is arcuate.
9. The device of claim 8, wherein the drive section has a first portion of a first radius of curvature contiguous with the commitment section and
25 a second portion, contiguous with the first portion, of a second radius of curvature which is greater than the first radius of curvature.
10. The device of claim 9, wherein the drive section consists of the first and second portions.

11. The device of any of the preceding claims, wherein the commitment section is of a first length and the drive section is of a second length greater than the first length.

5 12. The device of any of the preceding claims, wherein the minimum actuating force is in the range of about 25-40N.

13. The device of any of the preceding claims, wherein the at least one cam follower surface is arcuate.

10

14. The device of claim 9 or any claim appended thereto, wherein the second portion has a radius of curvature in the range of about 15-40mm

15 15. The device of any of the preceding claims, wherein the actuator member is mounted in the device for movement on an arcuate path in the actuating direction.

16. The device of any of the preceding claims, configured and arranged such that the first angle to the axis becomes steeper as the actuator
20 member moves in the actuating direction.

17. The device of any of the preceding claims, configured and arranged such that the second angle to the axis remains constant, or substantially constant, as the actuator member moves in the actuating direction.

25

18. The device of any of the preceding claims, wherein the actuator member is mounted for pivotal movement about a first end thereof and the at least one cam surface is disposed on the actuator member remote from the first end.

30

19. The device of any of the preceding claims, wherein the dispensing member is a dispensing container in which the supply of the fluid product is contained.

5 20. The device of claim 18 or claims 18 and 19, wherein the dispensing direction is an upward direction and the first end of the actuator member is a lower end thereof.

21. The device of claim 20, wherein the at least one cam follower
10 surface is disposed towards an upper end of the dispensing member.

22. The device of claim 19 or any claim appended thereto, wherein the dispensing container has a pump which is caused to pump the dose of the fluid product from the dispensing outlet in response to the dispensing
15 container being moved in the dispensing direction by the actuator member.

23. The device of any of the preceding claims, wherein the actuator member is the sole actuator member.

20

24. The device of any of the preceding claims, wherein the dispensing outlet is in a nozzle sized and shaped for insertion into a body cavity.

25. The device of claim 24, wherein the nozzle is for insertion into a
25 nostril of a human or animal body.

26. The device of any of the preceding claims, wherein the fluid product is a medicament.

27. The device of any of the preceding claims, wherein the dispensing member and housing have co-operating guide members for guiding movement of the dispensing member along the axis.

5 28. The device of claim 27, wherein the co-operating guide members prevent rotation of the dispensing member about the axis.

29. The device of claim 27 or 28, wherein one of the guide members comprises a runner and the other guide member comprises a track for the
10 runner.

30. A fluid dispensing device for dispensing a fluid product having:-
a dispensing outlet from which the fluid product is dispensable,
a supply of the fluid product,
15 a dispensing member mounted for movement in a dispensing direction along an axis which causes a dose of the fluid product in the supply to be dispensed from the dispensing outlet, and
a finger-operable actuator member mounted for movement in an actuating direction which is generally transverse to the axis,
20 wherein the actuator member has at least one cam surface and the dispensing member has at least one cam follower surface,
wherein the actuator member is movable in the actuating direction to cause the at least one cam surface to bear against the at least one cam follower surface to cam the dispensing member in the dispensing direction
25 to cause the fluid product dose to be dispensed from the dispensing outlet, and
wherein the actuator member further has a stop to stop the dispensing member being movable along the axis in a direction opposite the dispensing direction beyond a predetermined axial position to provide
30 alignment of the least one cam surface and the at least one cam follower surface.

31. The device of claim 30, wherein the stop comprises at least one stop surface engagable with a respective surface of the dispensing member.

5

32. The device of claim 31, wherein the at least one stop surface extends generally transversely to the axis.

33. The device of claim 31 or 32, wherein the at least one stop surface
10 forms a continuation of the at least one cam surface.

34. The device of claim 31, 32 or 33, wherein the at least one surface of the dispensing member forms a continuation of the at least one cam follower surface.

15

35. The device of any of claims 30 to 34, wherein the at least one cam surface is presented by a nose section of the actuator member.

36. The device of claim 35 when appended to any of claims 31 to 34,
20 wherein the at least one stop surface is presented by a tip portion of the nose section.

37. A fluid dispensing device for dispensing a fluid product having:-
a housing with a dispensing outlet, the housing adapted to receive therein
25 a dispensing container containing the fluid product for movement of the dispensing container along an axis from a rest position relative to the housing to a dispensing position relative to the housing which causes the dispensing container to dispense a dose of the fluid product through the dispensing outlet, the housing having an access opening through which
30 the dispensing container is insertable into the housing along the axis to the rest position, and

at least one finger-operable actuator member mounted in the housing for movement inwardly with respect to the housing, transverse to the axis, to cause the dispensing container to move from the rest position to the dispensing position,

5 wherein the actuator member is movable from an outward position with respect to the housing, which enables the dispensing container to be inserted through the access opening to the rest position in the housing, to an inward position with respect to the housing, which prevents the dispensing container being inserted through the access opening to the rest
10 position in the housing, but from which inward position the actuator member is able to be moved inwardly with respect to the housing to cause a dispensing container disposed in the rest position to move to the dispensing position, and

wherein the device has a releasable detent mechanism for selectively
15 holding the actuator member in its outward and inward positions.

38. The dispenser of claim 37, wherein the detent mechanism is on the housing and/or the actuator member.

20 39. The dispenser of claim 37 or 38, wherein the detent mechanism comprises a stop element on either the housing or the actuator member which is movable from a first position, which prevents movement of the actuator member between the outward and inward positions, to a second position, which enables movement of the actuator member between the
25 outward and inward positions.

40. The dispenser of claim 39, in which the detent mechanism comprises a bias to bias the stop element to its first position.

30 41. The dispenser of claim 39 or 40, in which the stop element is on the actuator member and abuts the housing in its first position.

42. A fluid dispenser adapted for dispensing a fluid product into the nasal cavity of a user having a nozzle sized and shaped for insertion into a nostril of the user and a housing in which the fluid product is containable,
5 wherein the housing has an opening in which the nozzle is received and a fastening mechanism which fastens the nozzle in the opening.

43. The dispenser of claim 42, wherein the housing houses a dispensing container which contains the fluid product and has a dispensing member,
10 wherein the nozzle has an outlet passageway through which, in use, the fluid product is dispensed from the dispenser, and wherein the container is positioned in the housing so that the dispensing member and the outlet passageway are in direct fluid communication.

15 44. The dispenser of claim 43, wherein the dispensing member is engaged with the outlet passageway.

45. The dispenser of any of claims 42 to 44, wherein the fastening mechanism has a clamp member which clamps the nozzle in the opening.
20

46. The dispenser of any of claims 42 to 45, wherein the nozzle has a flange abutting an inner surface of the housing and the fastening mechanism fastens the flange to the inner surface to retain the nozzle in the opening.

25

47. The dispenser of claim 45 or claims 45 and 46, wherein the clamp member is a collar structure provided on the inner surface of the housing, the collar structure being bent or folded over the flange to clamp the flange to the inner surface.

30

48. A set of component parts for manufacturing a plurality of fluid dispensers for dispensing a fluid product into a nasal cavity of a user, the set comprising a plurality of nozzles sized and shaped for insertion into a user's nostril and a plurality of housings for receiving a supply of the fluid
5 product, wherein each nozzle is identical, each housing has an opening for receiving one of the nozzles, and each housing further has a different characteristic from the others.

49. The set of claim 48, wherein each housing is of a different colour.
10

50. The set of claim 48 or 49, wherein each housing is of a different shape.


51. The set of claim 48, 49 or 50, further comprising a plurality of
15 containers, one for each dispenser, each container containing an identical or different fluid medicament formulation.

52. A fluid dispenser adapted for dispensing a fluid product into the nasal cavity of a user having a nozzle sized and shaped for insertion into a
20 nostril of the user and a housing in which the fluid product is containable and which has an opening in which the nozzle is receivable, wherein the nozzle is made from a different material than the housing.

53. The dispenser of claim 52, wherein the nozzle and the housing are
25 of different plastics materials.


1/7

FIG. 1

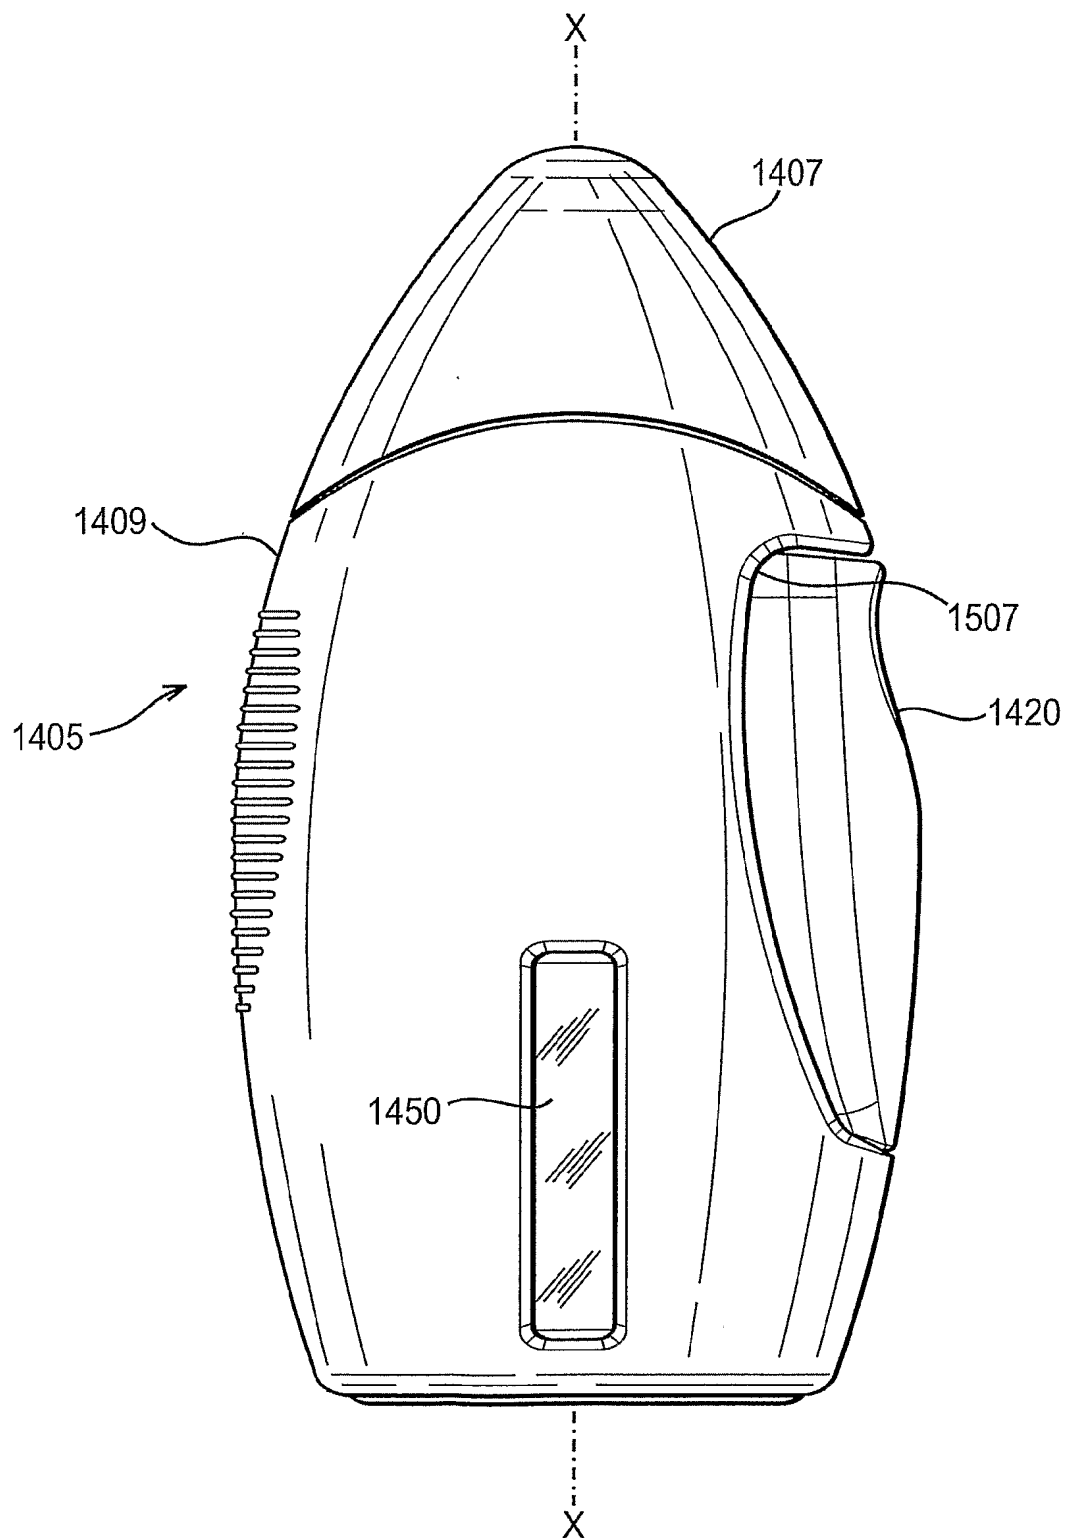


2/7

FIG. 2

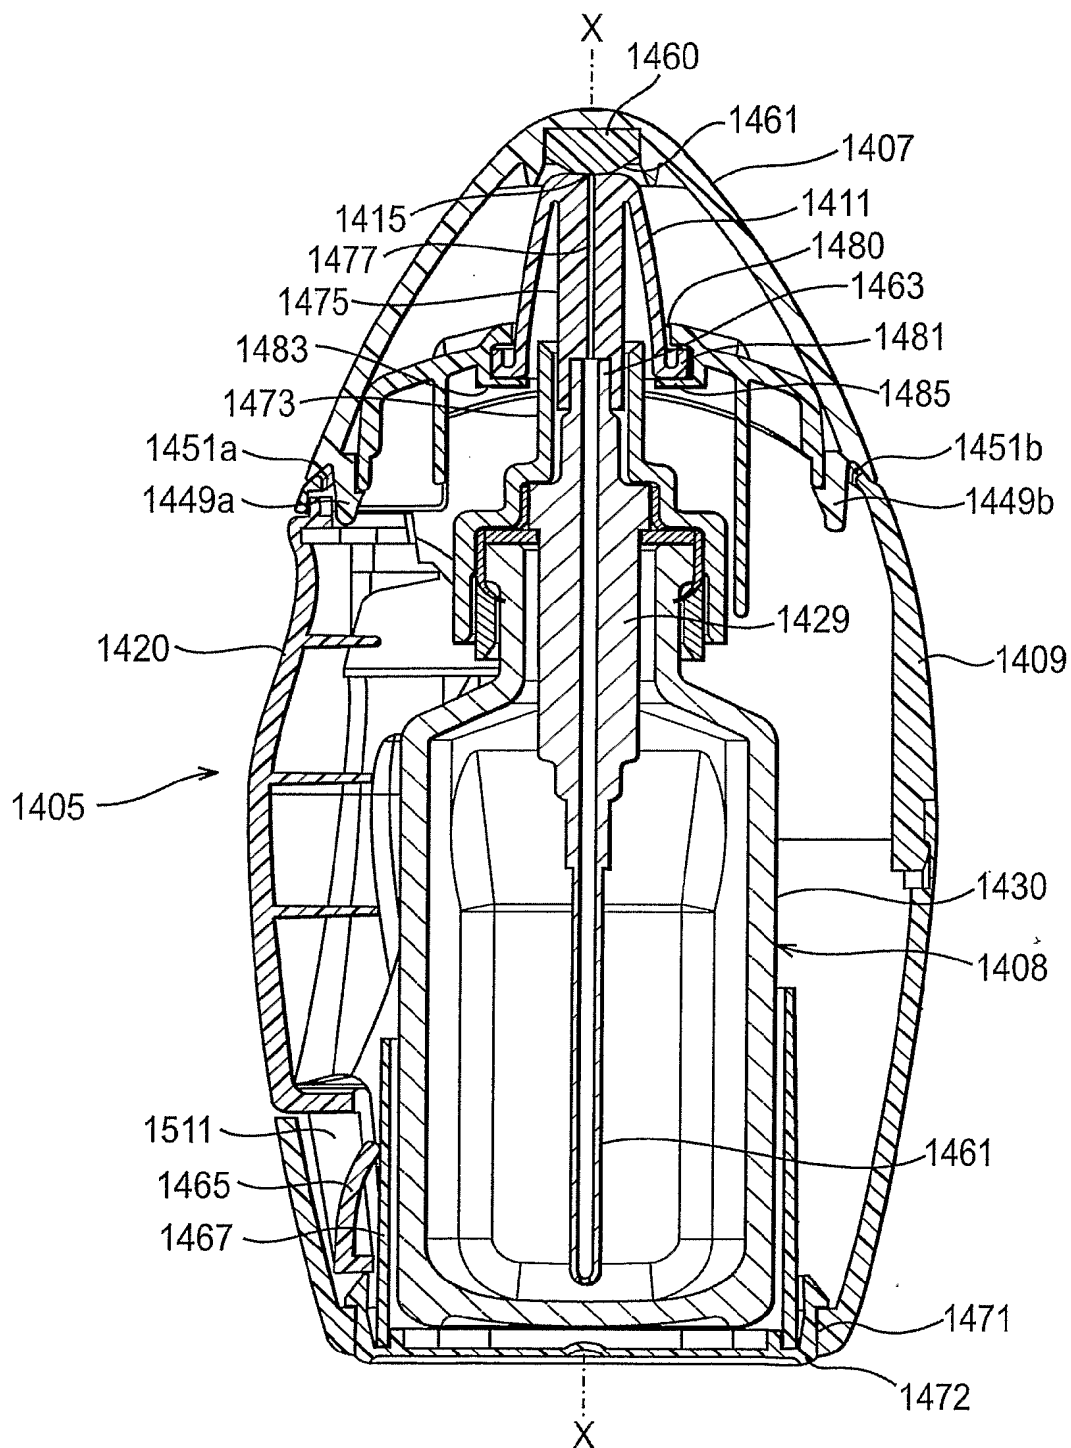

3/7

FIG. 3

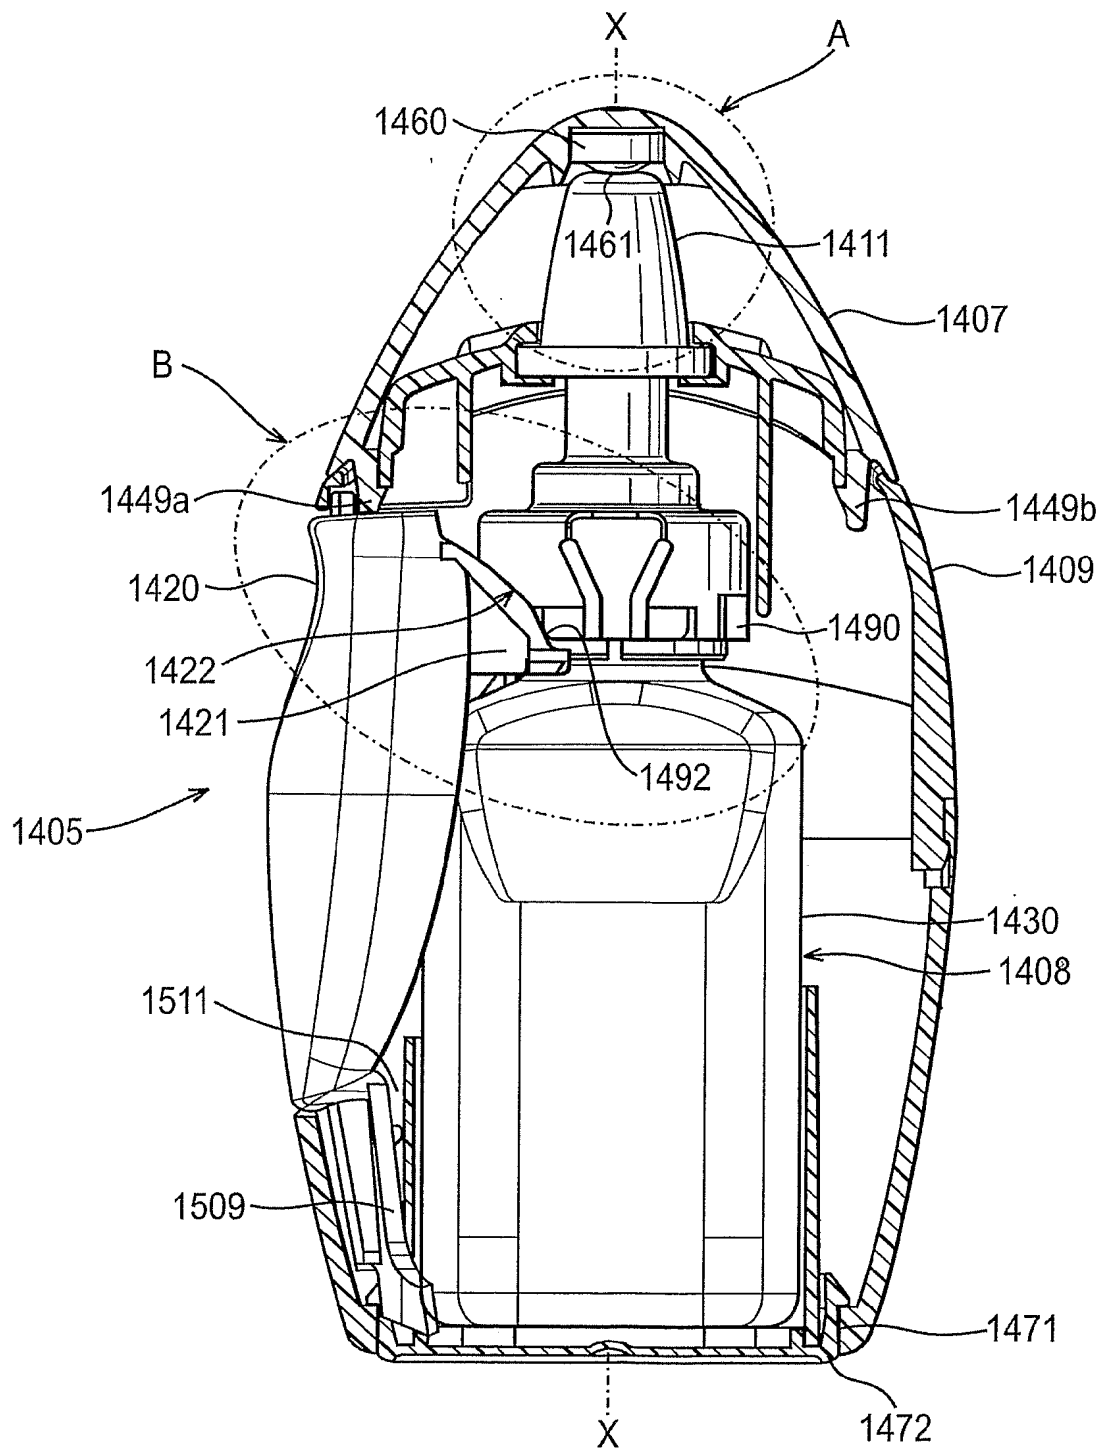

4/7

FIG. 4


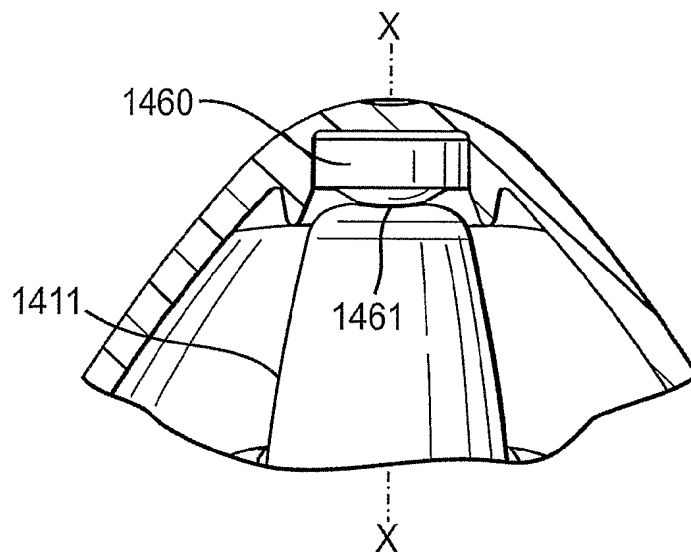


FIG. 5

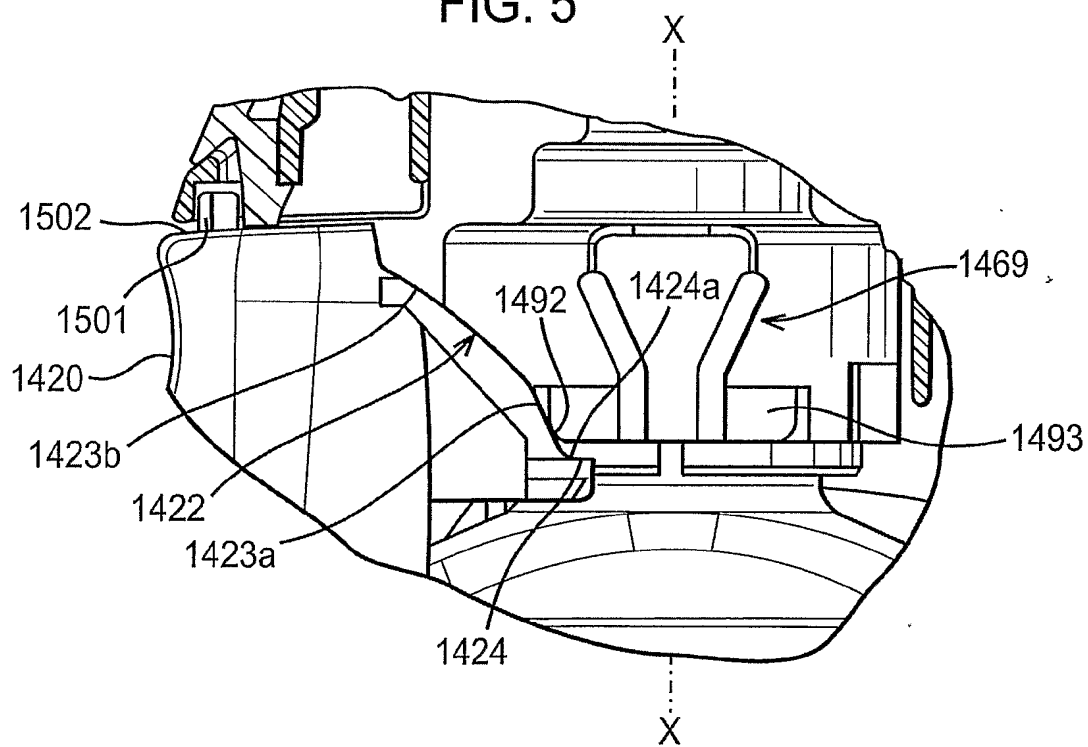

5/7
FIG. 6

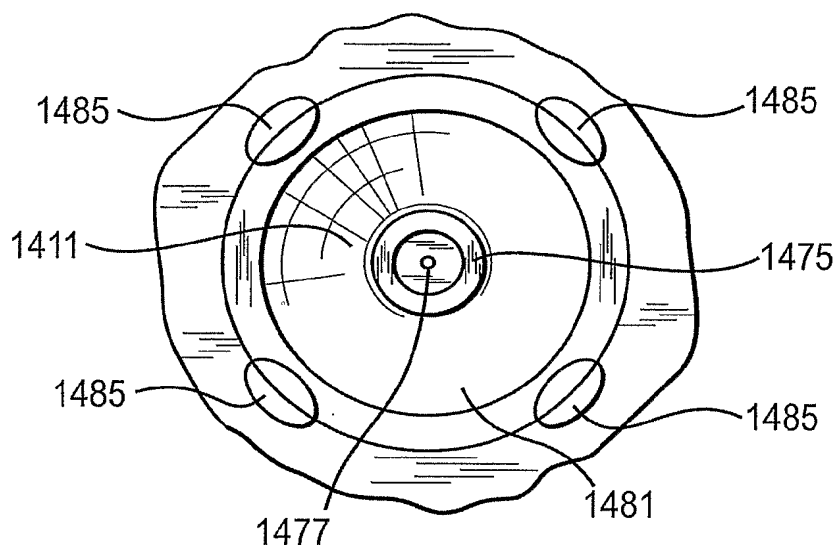


FIG. 7A


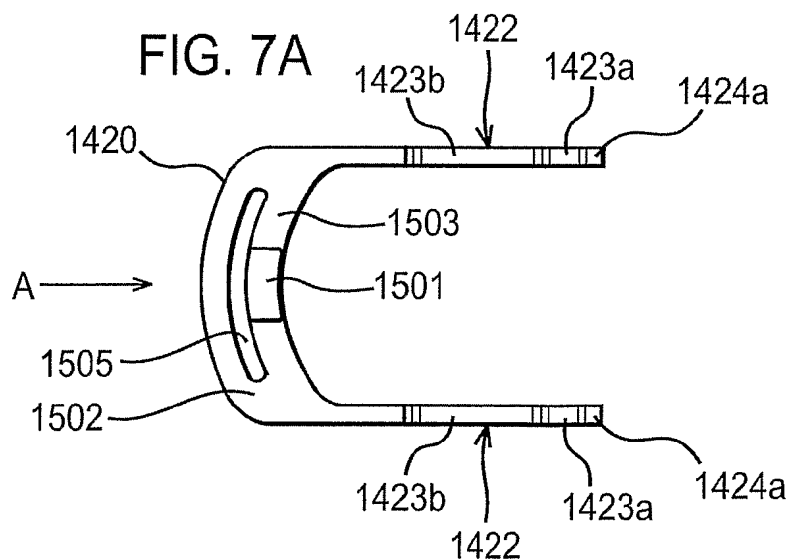


FIG. 7B

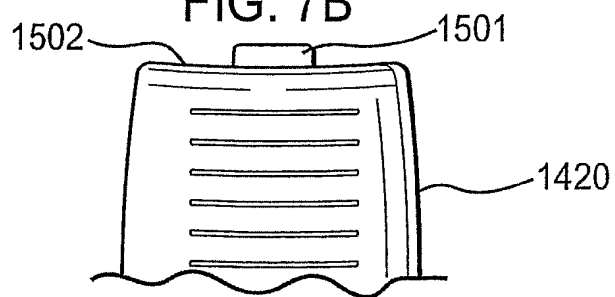

6/7

FIG. 8


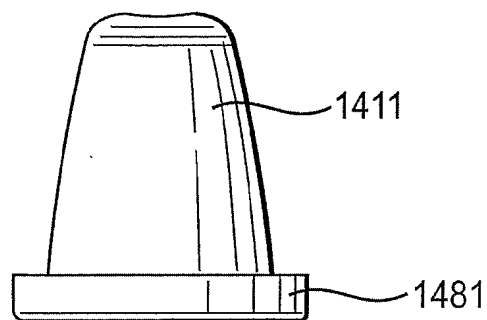


FIG. 9

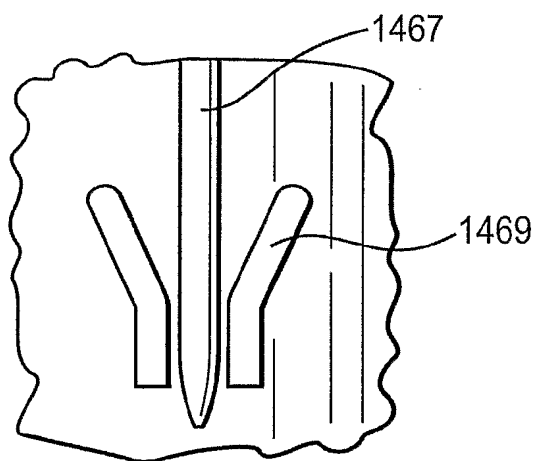

7/7

FIG. 10


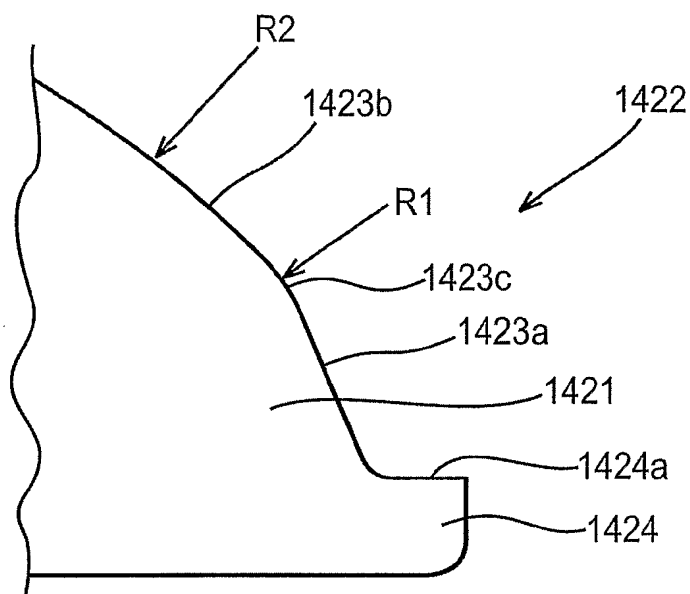


FIG. 11

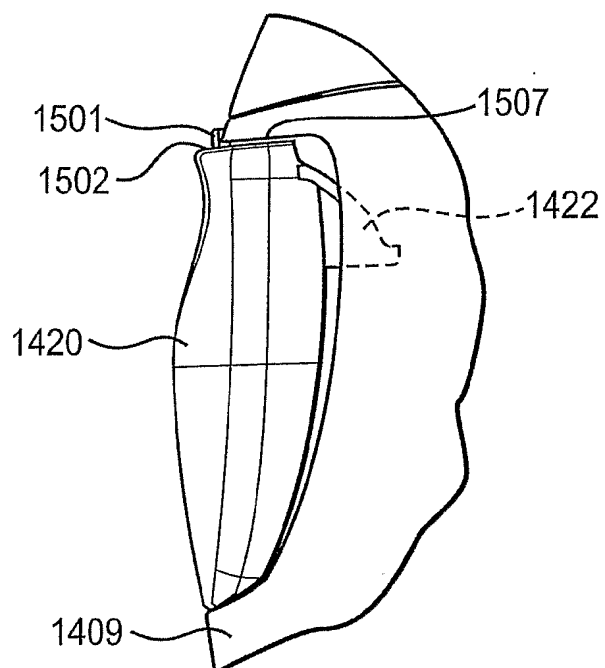

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2005/000944

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B65D83/14 B05B11/00 A61M15/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65D B05B A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 03/095007 A (GLAXO GROUP LIMITED; DAVIES, MICHAEL, BIRSHA) 20 November 2003 (2003-11-20) cited in the application pages 11-14; figures 1,2a,3 pages 33-34; figures 19,19a,19b pages 35-36; figures 22-24	1-29
X	WO 02/20168 A (VALOIS S.A; STRADELLA, GUISEPPE) 14 March 2002 (2002-03-14) page 7, line 27 - page 8, line 12 figures 3-6	30-41
A		1
X	US 5 899 365 A (EICHLER ET AL) 4 May 1999 (1999-05-04) the whole document	30-34, 37-41
A		1
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"8" document member of the same patent family

Date of the actual completion of the international search

16 August 2005

Date of mailing of the international search report

29.08.2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Azaizia, M

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB2005/000944

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1(independent), 2-29

A fluid dispensing device comprising essentially a finger-operable actuator member configured such that a minimum actuating force is required to be applied to said actuator member to cause dispensing of a fluid product.

2. claims: 30(independent), 31-36

A fluid dispensing device comprising essentially a finger-operable actuator member having a stop to provide alignment of at least one cam surface of said actuator member and at least one cam follower surface of a dispensing member.

3. claims: 37(independent), 38-41

A fluid dispensing device comprising essentially a releasable detent mechanism for selectively holding a finger-operable actuator member in outward and inward positions.

4. claims: 42(independent), 43-47

A fluid dispenser, adapted for dispensing a fluid product into the nasal cavity of a user, essentially comprising a nozzle, a housing and a fastening mechanism which fastens the nozzle in an opening of said housing.

5. claims: 48(independent), 49-51

A set of component parts for manufacturing a plurality of fluid dispensers for dispensing a fluid product into a nasal cavity of a user, the set essentially comprising a plurality of identical nozzles and a plurality of housings each having a different characteristic from the others.

6. claims: 52(independent), 53

A fluid dispenser, adapted for dispensing a fluid product into the nasal cavity of a user, essentially comprising a nozzle made from a different material than the housing of said fluid dispenser.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2005/000944

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 860 738 A (HEGEMANN ET AL) 29 August 1989 (1989-08-29) column 5, line 23 - column 6, line 33 figures 6-8	30-34, 37-41
A	----- FR 2 671 294 A (SAVONA JEAN LOUIS; TOMASSINI MICHEL; WIESENFELD ALBERT) 10 July 1992 (1992-07-10) the whole document	1 37-41 1,30
X	----- US 2002/170928 A1 (GRYCHOWSKI JERRY ET AL) 21 November 2002 (2002-11-21) page 7, paragraph 133 - page 8, paragraph 139; figures 38,39 page 14, paragraph 185	42-47, 52,53
X	----- WO 99/49984 A (THE PROCTER & GAMBLE COMPANY; RENNIE, PAUL, JOHN; WILKINSON, ERIC; PIE) 7 October 1999 (1999-10-07) page 7, lines 11-15 page 7, lines 28,29 page 11, line 11 - page 12, line 8 figures	52,53
X	----- US 6 305 371 B1 (FRID PER ET AL) 23 October 2001 (2001-10-23) column 1, lines 43-57 column 3, lines 15-55 figures 1-3	48,49,51
X	----- US 6 382 205 B1 (WEINSTEIN ROBERT E ET AL) 7 May 2002 (2002-05-07) column 3, lines 58-61 column 4, lines 34-45 figures	48-51
A	----- FR 2 812 826 A (VALOIS SA) 15 February 2002 (2002-02-15) page 6, line 9 - page 9, line 10; figures	1-29
P,X	----- WO 2004/080606 A (GLAXO GROUP LIMITED; DAVIES, MICHAEL, BIRSHA; GODFREY, JAMES, WILLIAM) 23 September 2004 (2004-09-23) page 44, line 1 - page 46, line 19 figures 24a-24e	1-46
E	----- WO 2005/028007 A (GLAXO GROUP LIMITED; DAVIES, MICHAEL, BIRSHA; HEDLEY, MARK, GRAHAM) 31 March 2005 (2005-03-31) page 26, line 25 - page 28, line 25 claims figures 8a,8b,9a,9b	1-29

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB2005/000944

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 03095007	A	20-11-2003	AU 2003224152 A1	11-11-2003
			AU 2003224153 A1	11-11-2003
			BR 0309373 A	22-02-2005
			CA 2484592 A1	20-11-2003
			WO 03095006 A2	20-11-2003
			WO 03095007 A2	20-11-2003
			EP 1501575 A2	02-02-2005
			EP 1501576 A2	02-02-2005
			AU 2003253367 A1	23-02-2004
			BR 0312230 A	12-04-2005
			CA 2494016 A1	12-02-2004
			WO 2004012799 A2	12-02-2004
			EP 1525017 A2	27-04-2005
WO 0220168	A	14-03-2002	FR 2813593 A1	08-03-2002
			CN 1511644 A	14-07-2004
			EP 1315576 A1	04-06-2003
			EP 1462180 A2	29-09-2004
			WO 0220168 A1	14-03-2002
			US 2004056049 A1	25-03-2004
			US 2004155067 A1	12-08-2004
US 5899365	A	04-05-1999	DE 4436051 A1	11-04-1996
			AT 184567 T	15-10-1999
			AU 3840195 A	02-05-1996
			CA 2202252 A1	18-04-1996
			DE 59506850 D1	21-10-1999
			DK 783443 T3	03-04-2000
			WO 9611152 A1	18-04-1996
			EP 0783443 A1	16-07-1997
			ES 2135776 T3	01-11-1999
			GR 3031648 T3	29-02-2000
			JP 3620850 B2	16-02-2005
			JP 2002514989 T	21-05-2002
US 4860738	A	29-08-1989	US 4771769 A	20-09-1988
			AT 20826 T	15-08-1986
			AU 568373 B2	24-12-1987
			AU 2771184 A	07-11-1985
			CA 1219845 A1	31-03-1987
			DE 3364775 D1	28-08-1986
			EP 0111875 A1	27-06-1984
			JP 59120266 A	11-07-1984
FR 2671294	A	10-07-1992	FR 2671294 A1	10-07-1992
US 2002170928	A1	21-11-2002	WO 02096490 A2	05-12-2002
WO 9949984	A	07-10-1999	AU 751624 B2	22-08-2002
			AU 2741499 A	18-10-1999
			BR 9909269 A	04-09-2001
			CA 2325043 A1	07-10-1999
			CN 1295502 A ,C	16-05-2001
			CZ 20003511 A3	12-12-2001
			EG 21747 A	27-02-2002
			EP 1087841 A1	04-04-2001
			HU 0101096 A2	30-07-2001
			WO 9949984 A1	07-10-1999

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB2005/000944

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9949984	A	ID 26014 A	16-11-2000
		JP 2002509797 T	02-04-2002
		NO 20004901 A	29-11-2000
		TR 200002807 T2	21-02-2001
US 6305371	B1 23-10-2001	AU 726478 B2	09-11-2000
		AU 7463098 A	08-12-1998
		BR 9809283 A	27-06-2000
		CA 2288747 A1	19-11-1998
		CN 1255866 A ,C	07-06-2000
		EP 0989874 A1	05-04-2000
		JP 2001524858 T	04-12-2001
		WO 9851360 A1	19-11-1998
US 6382205	B1 07-05-2002	NONE	
FR 2812826	A 15-02-2002	FR 2812826 A1	15-02-2002
WO 2004080606	A 23-09-2004	WO 2004080606 A1	23-09-2004
WO 2005028007	A 31-03-2005	WO 2005028007 A1	31-03-2005